



HI - TECH SOLAR SOLUTION

Solutions You Can Trust.

SOLAR EPC PROPOSAL

Detailed Techno-Commercial Proposal

31.27 Kwp Roof Top Solar System

Client

RAJ NONWOVEN
ENTERPRISE

System Size

31.27 Kwp

Validity

10 Days

Client Information

Client Name : RAJ NONWOVEN ENTERPRISE

Prepared For : RAJ NONWOVEN ENTERPRISE

Customer Contact : JUZER BHAI

Consumer Type : LT Consumer

Consumer Number : 09902151795

Proposal Controls

Prepared By : Er. Ilyas Kaydawala

Date of Issue : 19-12-2025

Valid Till : 10 Days from date of issue

Proposal Ref. : Quotation 786-110 - RAJ NONWOVEN
ENTERPRISE - 31.27 KW

Project Scope : Design, supply, installation, testing and
commissioning

Project Coordination Desk

Er. Ilyas Kaydawala +91-8140535380

Mr. Ammar Kotawala +91-8128491230

Mr. Husain Kotawala +91-7069822153

Email: hitechsolarsolu@gmail.com

Submission Note

This proposal has been prepared for evaluation of a 31.27 Kwp rooftop solar system and includes the EPC scope, technical configuration, commercial summary, generation estimate, and implementation support details.

+91-8140535380

hitechsolarsolu@gmail.com

10 Days from date of issue



Executive Summary

We are pleased to present our proposal for the installation of a solar power plant at your facility. This project is designed to help your organization reduce electricity costs, lower carbon emissions, and move towards long-term energy sustainability.

Our comprehensive solution covers all aspects of the project, from design and procurement to installation, commissioning, and post-installation support. By partnering with us, you gain access to industry-leading technology, quality workmanship, and professional project management.

The solar power system will be installed as per applicable regulations and safety standards, and is structured to operate efficiently over its entire lifecycle. Our team ensures seamless coordination with local authorities and utility providers to facilitate net metering and necessary approvals.

This proposal outlines the commercial terms, implementation plan, warranty coverage, and after-sales support details. It reflects our commitment to delivering reliable, cost-effective, and environmentally responsible energy solutions tailored to your business needs.

We look forward to working with you and contributing to your sustainability goals.

Description of Services

We propose to provide the following services for the installation of a solar plant:

Engineering

- Detailed site survey and feasibility analysis.
- Design of the solar power plant, including electrical and structural engineering.

Procurement

- Procurement of all necessary components and materials, including solar PV modules, inverters, mounting structures, cables, connectors, junction boxes, switchgear, and protection systems.
- All components shall comply with applicable quality standards such as BIS and IEC.

Construction and Installation

- Civil and structural works, including foundations and mounting systems.
- Mechanical installation of modules and mounting structures.
- Electrical installation, including cabling, inverter integration, earthing, and lightning protection.
- Synchronization with the grid as per DISCOM and CEIG guidelines.

Testing and Commissioning

- Pre-commissioning checks and testing of all systems.
- System energization and performance testing.
- Grid synchronization and approvals from relevant authorities.
- Preparation and submission of commissioning reports.

Training and Support

- Training sessions for customer staff on operation and maintenance of the solar plant.
- Ongoing technical support and maintenance services, as applicable.

Documentation and Approvals

- Assistance in obtaining statutory approvals such as CEIG, DISCOM, and net metering.
- Preparation of as-built drawings and final project reports.
- Warranty certificates, performance guarantees, and handover documents.



Technical Proposal

Parameter	Description	Remarks
System Size	31.27 Kwp	-
System Type	On Grid	-
Required Area	1564 Sqft Minimum	50 sqft per kW
Module Type	590Wp Solar Module	-
Module Efficiency	-	-
Module Make & Rating	-	Data sheet Attached
Product Warranty	30 years	Linear Power Warranty for 30 years with 2% for 1st year degradation and 0.5% from year 2 onward
Inverter Type	-	-
Inverter Make & Rating	-	-
Inverter Warranty Coverage	5 years from Manufacturer	-
Type Of Module Mounting Structure	-	Wind Speed Resistance as per IS 875: up to 120 kmph
Structure Height	6 ft at South, 8 Ft at North	-
Array Layout	South Facing, 14 Tilt, Portrait orientation	-
Type of ACDB Box	-	-
Type of DCDB Box	-	-
Type of Lightning Arrestor	-	-
Type of Earthing Road	-	-
Monitoring System	Remote Monitoring System (Wi-Fi/GPRS), Web & Mobile Interface	-
Net Metering Provision	System compatible and provision for Net Metering as per DISCOM norms	-
Expected Generation (Unit/Day)	144	4.59 units/day/kW
Approvals & Compliance	MNRE, DISCOM, CEIG, IEC/BIS Standards	-
Project Completion Timeline	3 -4 Weeks from Advance and Site Readiness	-

A Billing of Quantities

Sr No	Item Name	Make	Description	Unit	Quantity
1	Solar System	HI-TECH SOLAR SOLUTION	31.27 kW rooftop solar system supply and installation	KW	31.27



Scope of Work Matrix

Sr	Work Item / Activity	Responsibility	Remarks
1 Project Development & Engineering			
1.1	Feasibility Study (technical & financial)	Consumer with EPC Contractor	Can be jointly discussed with EPC.
1.2	Site Survey & Assessment	EPC Contractor	Includes structural and electrical feasibility.
1.3	System Design & Engineering Drawings	EPC Contractor	Electrical SLD, layout, shadow analysis, etc.
1.4	Statutory and Safety Compliance (design level)	EPC Contractor	Must follow MNRE, DISCOM, CEIG norms.
1.5	Land Levelling and Grading/Tree Cutting	Consumer	In Consumer Scope
1.6	Cable Trenches	Consumer	Existing Trenches considered
1.7	Control Rooms (RCC/PEB)	Consumer	Existing Covered Space in Control Room considered
1.8	Water Drainage	Consumer	In Customer Scope. Existing Drainage Considered
1.9	Water and Electricity	Consumer	Supply of Free Water and Free Electricity in Customer Scope. during I&C and O&M (If Appl.)
2 Procurement & Supply			
2.1	Procurement of Solar Modules (approved make)	EPC Contractor	Must meet MNRE ALMM list and BIS norms.
2.2	Procurement of Inverters	EPC Contractor	Must meet DISCOM & MNRE specs.
2.3	Procurement of Mounting Structures	EPC Contractor	Corrosion-resistant (hot dip galvanized).
2.4	Cables, Junction Boxes, Earthing Material	EPC Contractor	IS-compliant cables and materials.
2.5	Transportation to Site	EPC Contractor	Delivered to consumer site.
3 Installation & Construction			
3.1	Module Mounting Structure Installation	EPC Contractor	Based on roof type (RCC, sheet metal, etc.).
3.2	Module Installation	EPC Contractor	Including alignment and clamping.
3.3	Inverter & Electrical Panel Installation	EPC Contractor	Includes ACDB, DCDB, SPD, meters, etc.
3.4	Earthing, Lightning Protection System	EPC Contractor	Minimum 2 earth pits per inverter.
3.5	Cable Laying and Termination	EPC Contractor	As per standard cable routing practices.
3.6	ACDB to Client LT Panel (AC Cabling)	EPC Contractor	All AC Cables above 16 mm ² : 1.1KV Al conductor (Class-2), GS Armoured, XLPE Insulation, PVC outer sheath Cable.
3.7	Client LT Panel to Client HT Panel (AC Cabling)	DISCOM	N/A



Scope of Work Matrix

Sr	Work Item / Activity	Responsibility	Remarks
3.8	Cable Tray/ Conduits with supporting structures	EPC Contractor	Conduits have been considered for DC/AC cable Routing
3.9	HT Panel	N/A	Evacuation considered at LT Panel of same building @415V
3.10	Step-Up Transf. & Accessories	N/A	Evacuation considered at LT Panel of same building @415V
3.11	Module Cleaning System	Consumer	In Consumer Scope
3.12	Hand Rail	Consumer	Handrail/Parapet Walls on RCC Roofs in Customer Scope.
3.13	Staircase/Monkey Ladder	Consumer	Site Access (Staircase) in Customer Scope
3.14	PV-DG Controller	Consumer	Not Considered in any form ie . RPR/ Fuel Saver PLC Based PVDG Controller, etc.
3.6	Civil Works (if required)	EPC Contractor	Pedestals, cable trenching (if needed).
4 Grid Connection & Net Metering			
4.1	Liaisoning with DISCOM for Grid Approval	EPC Contractor (mostly)	Consumer may assist in document signatures.
4.2	Application for Net Metering	EPC Contractor (with Consumer)	Consumer's documents like PAN, Aadhaar needed.
4.3	Procurement of Bi-directional meter, Modem And Meter Box	Consumer (With EPC Contractor)	Only Applicable In HT Consumers.
4.4	Installation of Net Meter	DISCOM (coordinated by EPC)	EPC will ensure DISCOM visit and coordination.
4.5	CEIG Approval (if required)	EPC Contractor (with Consumer)	Required for capacity >10kW in Gujarat.
5 Testing & Commissioning			
5.1	System Testing (insulation, polarity, continuity, etc.)	EPC Contractor	Complete testing prior to energization.
5.2	Synchronization with Grid	EPC Contractor	In coordination with DISCOM.
5.3	Final Commissioning	EPC Contractor	Post-approval and net meter installation.
6 Documentation & Handover			
6.1	Submission of Final Drawings & Technical Documents	EPC Contractor	Includes SLDs, datasheets, manuals.
6.2	Warranty Certificates	EPC Contractor	For modules, inverters, BOS items.
6.3	O&M Manual & Training to Consumer Staff	EPC Contractor	Brief on periodic maintenance & troubleshooting.
7 Operation & Maintenance			



Scope of Work Matrix

Sr	Work Item / Activity	Responsibility	Remarks
7.1	O&M Responsibility (5 year free O&M typically)	EPC Contractor	Optional extension through AMC.
7.2	Performance Monitoring System	EPC Contractor	Remote monitoring (Wi-Fi/GPRS) for real-time data.
8 Commercial Aspects			
8.1	Project Financing	Consumer	Unless provided by EPC under RESCO/lease.
8.2	Insurance of Plant (during & post-installation)	Consumer	in consumer scope
8.3	Payment Terms	Consumer	As per contract milestones.
8.4	Transportation	EPC Contractor	Include in EPC Contractor Scope.
8.5	Payment Terms	Consumer	As per contract milestones.

Technical Considerations - Hi-Tech Solar Solution

At Hi-Tech Solar Solution, we bring tailored engineering insight and practical foresight into every solar installation. For this proposal, we have crafted the following project assumptions and guidelines to ensure seamless delivery, performance, and compliance.

System Design Overview

- The proposed solar PV system is aligned with prevailing state net metering policies. The final rating may be fine-tuned during the detailed design phase. Any change in site conditions or reduction in total capacity beyond 5% may result in a project cost revision.
- Power generated will be evacuated at 415V through the LT panel of the same building, ensuring localized integration and minimal loss.
- Module tilts are assumed at 10 degrees, or as per the natural slope of the mounting surface, optimizing seasonal sun tracking.

Installation and Materials Approach

- All components will adhere to Hi-Tech Solar Solution's approved brand list. In rare cases of non-availability, equivalent alternatives of matching quality may be considered, subject to mutual agreement.
- The installation area must remain completely shadow-free throughout the day. Customers are requested to ensure any nearby obstructions, such as trees or structures, are cleared before execution and remain so during the lifespan of the project.
- No interference, such as chemical discharge, obstruction of light, or overheating of the site, should occur that could hinder solar performance.

Infrastructure and Site Readiness

- Hi-Tech Solar Solution will supply appropriate switchgear and protection devices. The customer is expected to provide feeder panels or enclosures required to house these elements at the LT side.
- Any alteration in technical specifications or layout requested after the bid phase or during site assessment will be evaluated for commercial impact and may affect the total cost.
- The design includes AC cabling up to the inverter ACDB. Cable lengths beyond BOQ meters from ACDB to the LT panel will incur additional charges based on the extra meterage.
- For efficient execution, the customer must ensure clear and safe access to the installation location. This includes providing ladders, scaffolding, and any required paths for movement of materials and personnel.

Execution Terms

- This is a turnkey project. All unused or surplus materials post-commissioning shall be returned to Hi-Tech Solar Solution.
- Regulatory approvals like CEIG and net metering, in accordance with current state regulations, fall within our scope. If additional permissions are needed, they will be handled based on agreed terms.
- While Hi-Tech Solar Solution will pursue approvals diligently, we are not responsible for delays caused by government bodies or utilities. Such delays do not constitute grounds for penalties or payment withholding.
- The customer is expected to support the approval process by providing required documents such as existing CEIG-approved drawings and utility NOCs.
- Any statutory fees, hardware upgrades, or extra charges mandated by DISCOM or authorities will be borne by the customer.

Commissioning and Performance Definitions

- Commissioning refers to the date the system begins delivering power at the defined delivery point.



Technical Considerations - Hi-Tech Solar Solution (cont.)

- In some cases, where mechanical installation is completed but final commissioning is delayed due to customer-side infrastructure, it will be considered deemed commissioning.

- The delivery point for energy transfer is defined as the ACDB of the solar plant, connected to the customer's LT electrical panel.

What's Not Included

- Permanent rooftop access such as lifts or fixed ladders.

- Operation and maintenance services unless explicitly included.

- Network devices or IT infrastructure.

- Free provision of electricity or water during installation.

- Water supply at 6-bar pressure for module cleaning on rooftops.

- Spare panels or enclosures at the LT side for power evacuation.

- Assurance of rooftop strength. The customer must verify that GI sheets support 20-25 kg/m² and RCC slabs support 60-65 kg/m².

Solar Roof Top System Pricing

Solar Power Generating System With GST@6.00%	Rs.9,61,240.00
Solar System & Installation Cost	Rs.9,06,830.00
Tax / GST	Rs.54,410.00
Total Amount / Total Kw	Rs.30,740.01
Registration Charges	Rs.15,340.00
Net Metering Charges	Rs.62,032.00
Meter / Modem Charges	Rs.0.00
Grand Total	Rs.10,38,612.00

Payment Stages

Stage	Milestone / Remarks	%	Amount
Stage 1: Booking Amount	At the time of order confirmation. Ensures order confirmation and documentation.	10%	Rs.90,683.00
Stage 2: Approval Process	After GEDA registration and feasibility approval. Do not Covers registration and initial processing fees.	30%	Rs.2,72,049.00
Stage 3: Installation	After delivery of materials and start of installation work. For procurement of materials and labor costs.	30%	Rs.2,72,049.00
Stage 4: Testing & Inspection	After successful installation and CEIG inspection approval. Covers inspection, testing, and net metering processes.	20%	Rs.1,81,366.00
Stage 5: Project Handover	On successful commissioning and handover of the solar plant. Final settlement after completion of the project.	10%	Rs.90,683.00



Bank Details

Bank Name: AU SMALL FINANCE BANK
A/C Name: Hi-Tech Solar Solution
A/C Number: 1107865152531445
A/C Type: CURRENT ACCOUNT
IFSC Code: AUBL0002158
Branch: DAHOD

Required Documents

- Latest Electricity Bill
- Ownership proof
- Aadhar & Pan Card of Authorised Person
- Pan Card & Cancelled Cheque of firm
- Passport size photo of Authorised Person
- GST Certificate
- Undertaking on 300Rs stamp Paper
- Authorisation letter

System Generation & Revenue Details

Solar Roof Top Size

31.27 Kw

Calculated system size

Generation / Day

156 Unit

System size x rounded avg. generation

Yearly Saving

Rs.1,31,08,984.38

Sum of monthly savings

1st Year Generation

1638623 kWh

Sum of monthly generation

25 Year Saving


Rs.32,77,24,609.60

Yearly saving x 25

Predicted Monthly Generation & Savings


Predicted Monthly Generation (kWh)

Peak MAR: 151563

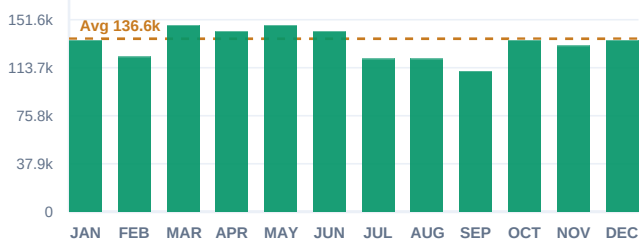

Predicted Monthly Savings (INR)

Peak MAR: Rs.1212501

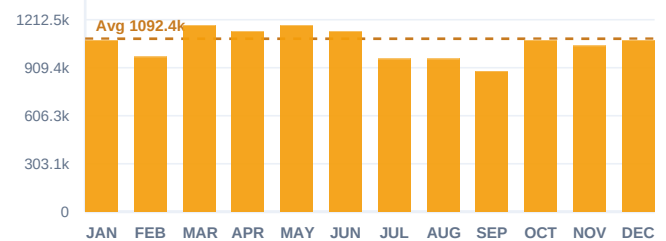

Avg. Unit / Day

4.59

Total Days

365

1st Year Generation

1638623 kWh

Yearly Saving

Rs.1,31,08,984.38

Note Predicted Generation is Indicative only. It may vary depending upon weather condition & Module Condition. Savings Calculated @ INR 8/Unit



Solar Plant Installation : Procedure & Time frame

Steps	Procedure	Description	Time Period (Approx)
Step-1	GEDA Registration	Start Registration process By Collecting Required Documents	1-2 working Days
Step-2	Document Verification	Verification of uploaded documents after registration	4-5 Working days
Step-3	Feasibility Approval	DISCOM will Give Feasibility Approval & issue Estimate of solar Meter after Document verification	10-15 Working days
Step-4	IFP Drawing Approval	Applicable for above 10kw. In this step HTSS will make an Electrical drawing and upload on IFP Portal For further installation process.	15-20 Working days
Step-5	Execution Work	After Getting all Approvals we will start plant execution work	15-20 Working days
Step-6	CEIG Inspection Approval	Applicable for above 10kw. After Completing the Installation Process We will Apply for CEIG Inspection, CEIG inspector will physically come on site and verify all the parameters.	15-20 Working days
Step-7	Net Metering Process	Once we get CEIG Approval, we will prepare a file for net metering process and submit it to DISCOM for meter installation process	30-45 Working days
Step-8	Commissioning & Testing	After Installation and CEIG approval Testing procedure will be done by HTSS	1-2 working Days
Step-9	Completion of project	After testing, HTSS will handover the plant to the client	1-2 working Days
Note	The procedure and timeframe mentioned above are approximate and may vary depending on various factors such as weather conditions, document processing delays, payments delay and approvals from concerned authorities. These timelines are provided as a general guideline and are not fixed.		

Solar Plant ROI Calculator

Parameter	Unit	Value	Notes
Project Capacity	kW	31.27	Size of plant
Total Cost	INR	Rs.9,61,240.00	Total EPC cost
Average Daily Generation	kWh / kWp / day	4.00	Based on site data
Average Yearly Shutdown	Days	30	Plant or grid-side maintenance downtime
Electricity Tariff (Year 1)	INR / kWh	Rs.8.00	Current grid rate
Tariff Escalation	%	3.00	Expected yearly increase
Annual Power Degradation (After 1st Year)	%	2.00	Module efficiency drop after Year 1
Annual Power Degradation (From 3rd Year onward)	%	0.50	Module efficiency drop from Year 3 onward
O&M Cost (Year 1)	% / INR	1.00 Rs.9,612.40	Year 1 maintenance cost as % of total cost
O&M Cost Escalation	%	3.00	Inflation in O&M
Project Life	Years	30	Standard plant life used for ROI projection



Quotation

Quotation 786-110 - RAJ NONWOVEN ENTERPRISE - 31.27 KW

Version 1.0 | 19 Dec 2025

Year 1 Generation 41902 kWh	Year 1 Gross Savings Rs.3,35,214.40	Year 1 Net Savings Rs.3,25,602.00
Estimated Payback 2.91 years	Lifetime Net Savings Rs.1,40,08,100.28	

ROI Calculation Table


Year	Generation	Tariff	Revenue	O&M	Net	Cumulative	Payback
1	41902	8.00	Rs.3,35,214.40	Rs.9,612.40	Rs.3,25,602.00	Rs.3,25,602.00	No
2	41064	8.24	Rs.3,38,365.42	Rs.9,900.77	Rs.3,28,464.64	Rs.6,54,066.64	No
3	40858	8.49	Rs.3,46,773.80	Rs.10,197.80	Rs.3,36,576.00	Rs.9,90,642.64	Yes
4	40654	8.74	Rs.3,55,391.12	Rs.10,503.73	Rs.3,44,887.40	Rs.13,35,530.04	Yes
5	40451	9.00	Rs.3,64,222.59	Rs.10,818.84	Rs.3,53,403.75	Rs.16,88,933.79	Yes
6	40249	9.27	Rs.3,73,273.53	Rs.11,143.41	Rs.3,62,130.12	Rs.20,51,063.91	Yes
7	40047	9.55	Rs.3,82,549.37	Rs.11,477.71	Rs.3,71,071.66	Rs.24,22,135.58	Yes
8	39847	9.84	Rs.3,92,055.72	Rs.11,822.04	Rs.3,80,233.69	Rs.28,02,369.26	Yes
9	39648	10.13	Rs.4,01,798.31	Rs.12,176.70	Rs.3,89,621.61	Rs.31,91,990.87	Yes
10	39450	10.44	Rs.4,11,783.00	Rs.12,542.00	Rs.3,99,241.00	Rs.35,91,231.87	Yes
11	39252	10.75	Rs.4,22,015.80	Rs.12,918.26	Rs.4,09,097.54	Rs.40,00,329.41	Yes
12	39056	11.07	Rs.4,32,502.90	Rs.13,305.81	Rs.4,19,197.09	Rs.44,19,526.50	Yes
13	38861	11.41	Rs.4,43,250.59	Rs.13,704.98	Rs.4,29,545.61	Rs.48,49,072.11	Yes
14	38667	11.75	Rs.4,54,265.37	Rs.14,116.13	Rs.4,40,149.24	Rs.52,89,221.35	Yes
15	38473	12.10	Rs.4,65,553.87	Rs.14,539.62	Rs.4,51,014.25	Rs.57,40,235.60	Yes
16	38281	12.46	Rs.4,77,122.88	Rs.14,975.81	Rs.4,62,147.07	Rs.62,02,382.67	Yes
17	38089	12.84	Rs.4,88,979.38	Rs.15,425.08	Rs.4,73,554.30	Rs.66,75,936.97	Yes
18	37899	13.22	Rs.5,01,130.52	Rs.15,887.83	Rs.4,85,242.69	Rs.71,61,179.66	Yes
19	37710	13.62	Rs.5,13,583.61	Rs.16,364.47	Rs.4,97,219.15	Rs.76,58,398.81	Yes
20	37521	14.03	Rs.5,26,346.17	Rs.16,855.40	Rs.5,09,490.77	Rs.81,67,889.58	Yes
21	37333	14.45	Rs.5,39,425.87	Rs.17,361.06	Rs.5,22,064.81	Rs.86,89,954.38	Yes
22	37147	14.88	Rs.5,52,830.60	Rs.17,881.90	Rs.5,34,948.71	Rs.92,24,903.09	Yes
23	36961	15.33	Rs.5,66,568.44	Rs.18,418.35	Rs.5,48,150.09	Rs.97,73,053.18	Yes




ROI Calculation Table

Year	Generation	Tariff	Revenue	O&M	Net	Cumulative	Payback
24	36776	15.79	Rs.5,80,647.67	Rs.18,970.90	Rs.5,61,676.77	Rs.1,03,34,729.95	Yes
25	36592	16.26	Rs.5,95,076.76	Rs.19,540.03	Rs.5,75,536.73	Rs.1,09,10,266.68	Yes
26	36409	16.75	Rs.6,09,864.42	Rs.20,126.23	Rs.5,89,738.19	Rs.1,15,00,004.87	Yes
27	36227	17.25	Rs.6,25,019.55	Rs.20,730.02	Rs.6,04,289.53	Rs.1,21,04,294.40	Yes
28	36046	17.77	Rs.6,40,551.29	Rs.21,351.92	Rs.6,19,199.37	Rs.1,27,23,493.77	Yes
29	35866	18.30	Rs.6,56,468.99	Rs.21,992.48	Rs.6,34,476.51	Rs.1,33,57,970.28	Yes
30	35687	18.85	Rs.6,72,782.24	Rs.22,652.25	Rs.6,50,129.99	Rs.1,40,08,100.28	Yes

Graphical Representation Of Yearly Generation V/S Tariff

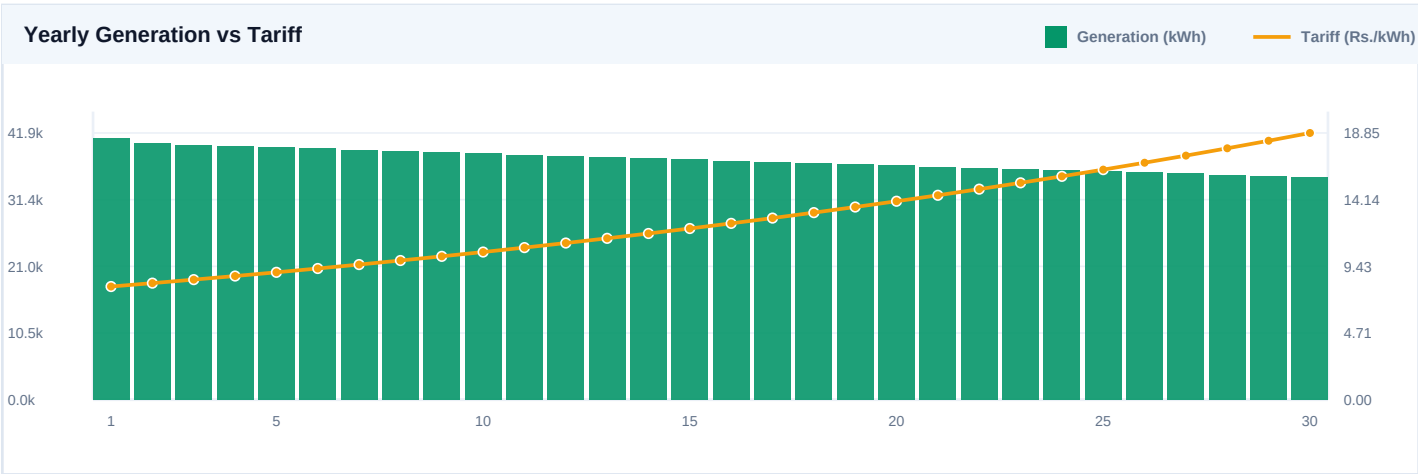

Graphical Representation of Annual V/S Cumulative Savings

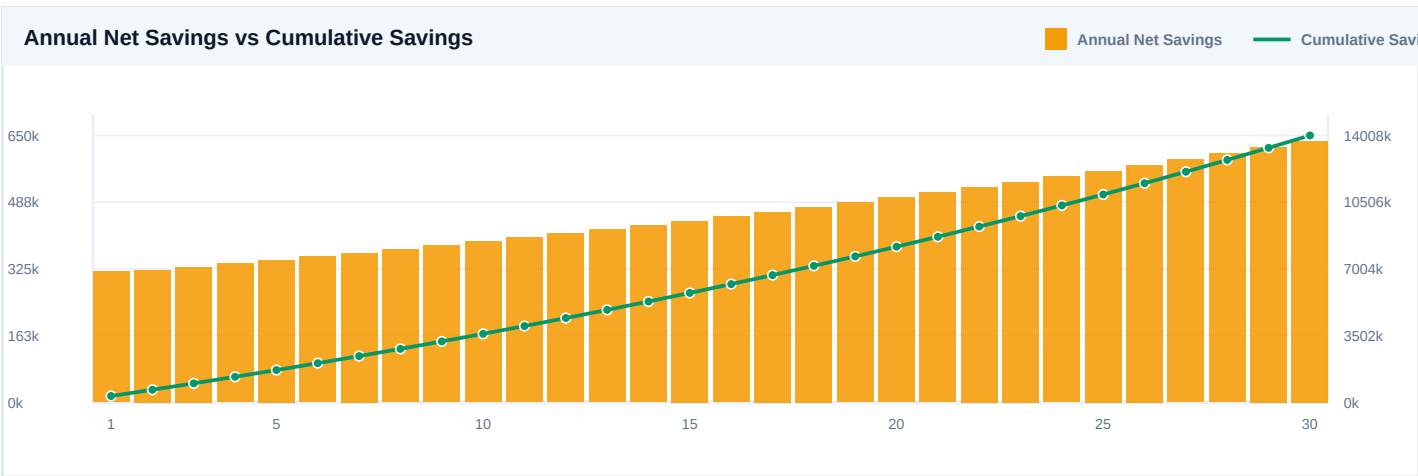

Terms and Conditions

1. Quotation Validity: The quotation provided is valid for a period of 15 days from the date of issuance. Prices are subject to change after this period.



Terms and Conditions (cont.)

2. **Warranty:** Hi-Tech Solar Solution warrants the installation workmanship for a period of 5 years from the date of commissioning. Solar panels, inverter, MCB, fuse, cartridges, and other equipment are subject to manufacturer warranties, details of which will be provided upon installation.
3. **Maintenance and Service:** Hi-Tech Solar Solution offers optional maintenance and service plans beyond the warranty period. Details of these plans can be provided upon request.
4. **Site Access:** The client shall provide unimpeded access to the installation site during agreed-upon times for the duration of the project.
5. **Permits and Approvals:** It is the responsibility of the client to obtain any necessary permits, approvals, or licenses required for the installation of the solar plant.
6. **Interruption in Work:** The customer must not interrupt the works, and shall abstain from any act or omission that may delay the works or make them more difficult or expensive for HTSS. The customer shall not unreasonably delay engineering approvals and shall make reasonable efforts to provide them within 7 days of submission of drawings.
7. **Liability:** Hi-Tech Solar Solution shall not be liable for any damages or losses resulting from acts of nature, accidents, or misuse of the solar plant after installation.
8. **Changes and Modifications:** Any changes or modifications to the project scope must be agreed upon in writing by both parties and may result in adjustments to the project timeline and cost.
9. **Cable Length:** Described cable length in BOQ is included in the standard plant rate. Cable length beyond the described BOQ will be charged extra as per actual.
10. **Plant Capacity Variation:** Plant capacity may vary due to solar panel size availability. Final billing amount will vary accordingly.
11. **Defective Components:** We will repair or, if found necessary, replace a defective component of the solar system for failure due to manufacturing defects. The repaired or replaced part or solar system does not carry a new warranty.
12. **Exclusions:** The warranty does not cover damage caused by acts of nature, accidents, misuse, or unauthorized modifications to the solar plant. Damage resulting from improper installation, maintenance, or servicing by parties other than Hi-Tech Solar Solution is not covered under this warranty.
13. **Inclusion of Excluded Items:** Any additional items due to change in scope or due to change in building or initial layout shall be charged extra and will be to the customer's account.
14. **Security and Safety:** On delivery of supplies to the customer's site in good condition, the customer shall be responsible for safety and security of the materials till handover to HTSS designated personnel for installation. The customer shall resolve disturbances at its premises and neighboring areas that impact project progress at its own risk and cost, and provide safety and security for HTSS personnel working at site. Any delay in execution or damage of materials due to disturbances at site shall be attributable to and compensated by the customer.
15. **Force Majeure Clause:** Force majeure refers to any event or circumstance beyond the reasonable control of HTSS, including natural calamities, health-related crises, labor disturbances, war, terrorism, embargoes, civil or military interference, and government actions. If a force majeure event prevents HTSS from fulfilling its obligations under this proposal, HTSS shall not be responsible for such non-performance provided the event directly causes the delay or failure. This does not absolve the customer of payment obligations. In the event of suspension due to force majeure, HTSS shall be entitled to recover payments for completed work, expenses for delivered materials, reasonable costs incurred in anticipation of project completion, demobilization costs, and additional costs arising from suspended third-party supplier contracts.
16. **Termination by Customer for Contractor Default:** The customer reserves the right to terminate the contract immediately by written notice if the contractor abandons or repudiates the contract, becomes bankrupt or insolvent, has a receiving order issued against it, compounds with creditors, or if a resolution or court order is made for winding up. In such termination, the contractor shall be entitled to payment for the completed portion of the contract, the value of unused or partially used plant and equipment present on-site, and reasonable costs incurred in protecting the facilities and restoring the site to a clean and safe condition, subject to deductions for any amount owed by the contractor to the employer before the termination date.
17. **Termination by Contractor Due to Customer Default:** The contractor may terminate the contract immediately by written notice if the customer fails to pay due amounts, fails to approve an invoice, becomes bankrupt or insolvent, has a receiving order issued against it, compounds with creditors, is wound up, or fails to support contractor obligations including site access, government permits, and dispatch clearance.
18. **Contractor's Entitlement Upon Termination:** If termination occurs due to customer default, the customer is liable to compensate the contractor for all related losses and damages, including payment for the executed portion of the facilities, demobilization costs, subcontractor settlements, site management costs, and expenses arising from obligations and claims undertaken in good faith with third parties related to the contract.
19. **Warranty Claim Handling:** Upon verification of a valid warranty claim, Hi-Tech Solar Solution will repair or replace the defective components within a reasonable time frame. If repair or replacement is not feasible, Hi-Tech Solar Solution reserves the right to provide an alternative solution.



Authorization

Client Acceptance

Signature / Date

For HI - TECH SOLAR SOLUTION

Authorized Signatory