



HI - TECH SOLAR SOLUTION

Solutions You Can Trust.

Detailed Techno-Commercial Proposal 31.27 Kwp Roof top Solar System

Client Name :	RAJ NONWOVEN ENTERPRISE	
Prepared for :	RAJ NONWOVEN ENTERPRISE	
Customer Contact Person :	JUZER BHAI	
Type of Consumer:	LT Consumet	
Consumer Number :	09902151795	
Prepared by :	Er. Ilyas Kaydawala	
HTSS Contact Person Name & Contact Numbers	Mr. Ilyas Kaydawala Mr. Ammar Kotawala Mr. Husain Kotawala Mob: +91-8140535380, Email : hitechsolarsolu@gmail.com	8140535380 8128491230 7069822153
Date of Issue :	19-12-2025	
Valid Till Date :	10 Days from date of issue.	

19-12-2025

Executive Summary:

We are pleased to present our proposal for the installation of a solar power plant at your facility. This project is designed to help your organization reduce electricity costs, lower carbon emissions, and move towards long-term energy sustainability.

Our comprehensive solution covers all aspects of the project—from design and procurement to installation, commissioning, and post-installation support. By partnering with us, you gain access to industry-leading technology, quality workmanship, and professional project management.

The solar power system will be installed as per applicable regulations and safety standards, and is structured to operate efficiently over its entire lifecycle. Our team ensures seamless coordination with local authorities and utility providers to facilitate net metering and necessary approvals.

This proposal outlines the commercial terms, implementation plan, warranty coverage, and after-sales support details. It reflects our commitment to delivering reliable, cost-effective, and environmentally responsible energy solutions tailored to your business needs.

We look forward to working with you and contributing to your sustainability goals.

Description of Services:

We propose to provide the following services for the installation of a solar plant:

Engineering

Detailed site survey and feasibility analysis. & Design of the solar power plant, including electrical and structural engineering.

Procurement

Procurement of all necessary components and materials, including: Solar PV modules, Inverters (string or central), Mounting structures, Cables, connectors, and junction boxes, switchgear, and protection systems
All components shall comply with applicable quality standards (e.g., BIS, IEC).

Construction & Installation

Civil and structural works, including foundations and mounting systems, Mechanical installation of modules and mounting structures, Electrical installation, including cabling, inverter integration, earthing, and lightning protection & Synchronization with the grid as per DISCOM/CEIG guidelines.

Testing & Commissioning

Pre-commissioning checks and testing of all systems, System energization and performance testing, Grid synchronization and approvals from relevant authorities & Preparation and submission of commissioning reports.

Testing and Commissioning:

We will conduct rigorous testing procedures to ensure the proper functioning of the solar plant before commissioning it for regular operation.

Training and Support:

We will provide training sessions for your staff on the operation and maintenance of the solar plant. & Additionally, we offer ongoing technical support and maintenance services.

Documentation & Approvals

Assistance in obtaining necessary statutory approvals (e.g., CEIG, DISCOM, net metering). Preparation of As-Built drawings and final project reports & Warranty certificates, performance guarantees, and handover documents.

19-12-2025

Technical Proposal :

Sr No	Parameter	Description	Remarks
1	System Size	31.27Kwp	
2	System Type	On Grid	
3	Required Area	1563.5 Sqft Minimum	
4	Module Type	590Wp600WP TOPCON BI - FACIAL PV MODULE	600WP
	Module Make & Rating	PAHAL / RAYZON / VIKRAM	Data sheet Attached
	Module Efficiency	21.38%	
	Product Warranty	30 years	Linear Power Warranty for 30 years with 2% for 1st year degradation and 0.5% from year 2 to
5	Inverter Type	ON GRID	Maximum AC power of 40 kW, a nominal AC power of 33 kW, and a maximum efficiency of 97 %
	Inverter Make & Rating	INV - SG33CX	Data sheet Attached
	Inverter Warranty Coverage	5 years from Manufacturer	
6	Type Of Module Mounting Structure	Mono Rail	Wind Speed Resistance as per IS 875: up to 120 kmph
	Structure Hight (If Elevated Structure)	6 ft At South , 8 Ft At North	Not Applicable in mono rail Structure
7	Array Layout	South Facing, 14° Tilt , Portrait orientation	
8	Type of ACDB Box	5 STAGE PROTECTION	
9	Type of DCDB Box	2 STAGE PROTECTION	
10	Type of Lightning Arrestor	Conventional Lightning Arrestor	
11	Type of Earthing Rod	COPPER BONDED SOLID ELECTRODE	
12	Monitoring System	Remote Monitoring System (Wi-Fi/GPRS), Web & Mobile Interface	
13	Net Metering Provision	System compatible and provision for Net Metering as per DISCOM norms	
14	Expected Generation(Unit/Day)	125	4 Units/Day/Kw (Generation Guarantee Up to 90%)
15	Approvals & Compliance	MNRE, DISCOM, CEIG, IEC/BIS Standards	
16	Project Completion Timeline	3 -4 Weeks from Advance and Site Readiness	



19-12-2025

A Billing of Quantities

Sr No	Item Name	Make	Description	Unit	Quantity
1	SOLAR MODULE	PAHAL / RAYZON / VIKRAM	TOPCon (Tunnel Oxide Passivated Contact) bi-facial PV modules are next-generation high-efficiency solar panels that generate power from both front and rear surfaces. These modules utilize advanced n-type cell technology, offering higher efficiency, better low-light performance, and lower degradation rates compared to traditional PERC modules. With bifacial gain ranging from 5% to 25% depending on site conditions, TOPCon modules deliver superior energy output and long-term reliability—ideal for commercial, industrial, and utility-scale installations.	Nos	53
2	INVERTER	SUNGROW	IP66 protection and C5 Anti-corrosion DC Type I+II SPD, AC Type II SPD Support AFCI 2.0 function Key component diagnosis and protection Smart IV Curve Diagnosis Grid fault record function, easy for remote O&M DC 15A current input, compatible with over 500W+ PV module Dynamic shading optimization mode Built-in PID recovery function	Nos	1
3	MODULE MOUNTING STRUCTURE	HINDUSTAR	The Solar Mono Rail Structure is a streamlined, single-rail mounting system designed for quick and secure installation of solar PV modules. Made from high-strength aluminum or galvanized steel, it offers lightweight construction, corrosion resistance, and structural stability. Ideal for rooftop and ground-mounted systems, mono rail structures reduce installation time and material usage while ensuring optimal panel alignment and wind resistance.	KW	31



19-12-2025

4	MAIN AC DISTRIBUTION BOX	MCB - SCHNEIDER / LK (L&T) MCCB - SCHNEIDER / LK (L&T) CONTACTOR - SCHNEIDER / LK (L&T) NVR - STANDERD SPD - FINDER ENCLOSER - (Note - ABS used till 50-60 kW)	The AC Distribution Box (ACDB) is designed to safely distribute the AC power from the solar inverter to the load or utility grid. It includes: MCB & MCCB for overload and short-circuit protection Contactor for automated load switching SPD (Surge Protection Device) for protection against electrical surges NVR (No-Volt Release) for protection against phase loss and ensuring safe re-energization This ACDB ensures reliable operation, enhanced safety, and compliance with standard electrical protection norms in solar power systems.	NOS	1
5	DC DISTRIBUTION BOX	DC MCB - SCHNEIDER / LK (L&T) SPD - FINDER	The DC Distribution Box (DCDB) is designed to protect and control the DC output from solar PV modules. It is equipped with: DC MCB (Miniature Circuit Breaker) for protection against overcurrent and short circuits SPD (Surge Protection Device) to protect against voltage surges and lightning-induced spikes This robust and weatherproof DCDB ensures the safe and reliable operation of the solar power system, enhancing overall system durability.	NOS	1
6	ESE LIGHTING ARRESTOR	Conventional Lightning Arrestor	Provides conical protection MOC. Copper with required Spikes for Building and Chimneys Protection	NOS	1



19-12-2025

7	EARTHING ROAD	ERTH - 50 MM X 3 MTR G.I EARTHING ELECTRODE (PIPE IN STRIP) - HEAVY	Hot dip galvanized pipe with corrosion protection, designed for fast fault current dissipation. Pipe inner space filled with high conductive material with top to bottom strip. Moisture booster chemical bags provided for low earth resistance Low maintenance on site	NOS	4
8	DC CABLE	APAR	Supply and laying of DC 1 Core x 6.0 sqmm copper flexible cable (Apar / Polycab / RR Kabel / Havells make), XLPE insulated, UV and weather resistant, suitable for interconnection of solar PV modules and DC circuits. Ensures high conductivity, low voltage drop, and long-term outdoor durability.	Meter	250
9	AC CABLE	APAR / POLYCAB / RR KABEL / HAVELLS	Supply and laying of AC 4 Core x 25 sqmm Aluminium Armoured Cable (Apar / Polycab / RR Kabel / Havells make), XLPE insulated, PVC sheathed, suitable for LT power distribution in solar systems. Designed for underground or outdoor installations, offering excellent mechanical protection, thermal resistance, and long service life under varying load conditions.	Meter	60
10	AC CABLE- 2	APAR / POLYCAB / RR KABEL / HAVELLS	Supply and laying of AC 2 Core x 6.0 sqmm copper flexible cable (Apar / Polycab / RR Kabel / Havells make), PVC insulated and sheathed, suitable for AC power connections in solar systems. Provides high conductivity, thermal stability, and reliable performance under continuous load and outdoor conditions.	Meter	0
11	EARTHING CABLE / STRIP	INDOCAB	Supply and laying of Earth 1 Core x 4.0 sqmm Copper Cable, PVC insulated, single-core, suitable for effective grounding of solar PV structures and equipment. Provides excellent conductivity, mechanical strength, and reliable fault current dissipation for enhanced system safety.	KG/METER	200
12	LA CABLE / STRIP	KANBERY / FLEXGUARD / GEONOM	Supply and laying of Earth 1 Core x 16 sqmm Aluminium Flexible Cable, PVC insulated, suitable for earthing of solar structures and LT panels. Provides cost-effective grounding solution with adequate conductivity and flexibility for reliable fault current dissipation and system safety.	KG/METER	60



19-12-2025

13	CABLE TRAY	FRP	Supply and installation of FRP Cable Tray, size 50mm (W) x 50mm (H) x 3mm (T) – FRP make, corrosion-resistant, UV-stabilized, and lightweight. Suitable for safe and durable routing of DC/AC cables in solar power installations under harsh outdoor conditions.	MTR	0
14	WALK WAY	FRP	Supply and installation of FRP Solar Walkway, size 272mm (W) x 3660mm (L) x 25mm (H), with mesh size 38mm x 38mm. Made from corrosion-resistant, UV-stabilized fiber-reinforced plastic, suitable for safe and durable access pathways between solar module rows on rooftops or ground-mounted structures.	MTR	53
15	FOUNDATION BLOCK	HTSS SCOPE	RCC Foundation Block – 400x400x400 mm, M25 grade concrete	NOS	4
16	Fire & Safety		Fire Extinguisher & Sign Bord Marking	Nos	As Per Required
17	INSTALLATION & COMMISSIONING		Hi – Tech Solar Solution Scope		

19-12-2025

Scope of Work Matrix: Rooftop Solar Power Plant

Sr No	Work Item / Activity	Responsibility	Remarks
1	Project Development & Engineering		
1.1	Feasibility Study (technical & financial)	Consumer with EPC Contractor	Can be jointly discussed with EPC.
1.2	Site Survey & Assessment	EPC Contractor	Includes structural and electrical feasibility.
1.3	System Design & Engineering Drawings	EPC Contractor	Electrical SLD, layout, shadow analysis, etc.
1.4	Statutory and Safety Compliance (design level)	EPC Contractor	Must follow MNRE, DISCOM, CEIG norms.
1.5	Land Levelling and Grading/Tree Cutting	Consumer	In Consumer Scope
1.6	Cable Trenches	Consumer	Existing Trenches considered
1.7	Control Rooms (RCC/PEB)	Consumer	Existing Covered Space in Control Room considered
1.8	Water Drainage	Consumer	In Customer Scope. Existing Drainage Considered
1.9	Water and Electricity	Consumer	Supply of Free Water and Free Electricity in Customer Scope. during I&C and O&M (If Appl.)
2	Procurement & Supply		
2.1	Procurement of Solar Modules (approved make)	EPC Contractor	Must meet MNRE ALMM list and BIS norms.
2.2	Procurement of Inverters	EPC Contractor	Must meet DISCOM & MNRE specs.
2.3	Procurement of Mounting Structures	EPC Contractor	Corrosion-resistant (hot dip galvanized).
2.4	Cables, Junction Boxes, Earthing Material	EPC Contractor	IS-compliant cables and materials.
2.5	Transportation to Site	EPC Contractor	Delivered to consumer site.
3	Installation & Construction		
3.1	Module Mounting Structure Installation	EPC Contractor	Based on roof type (RCC, sheet metal, etc.).
3.2	Module Installation	EPC Contractor	Including alignment and clamping.
3.3	Inverter & Electrical Panel Installation	EPC Contractor	Includes ACDB, DCDB, SPD, meters, etc.

19-12-2025

3.4	Earthing, Lightning Protection System	EPC Contractor	Minimum 2 earth pits per inverter.
3.5	Cable Laying and Termination	EPC Contractor	As per standard cable routing practices.
3.6	ACDB to Client LT Panel (AC Cabling)	EPC Contractor	All AC Cables above 16 mm ² : 1.1KV Al conductor (Class-2), GS Armoured, XLPE Insulation, PVC outer sheath Cable.
3.7	Client LT Panel to Client HT Panel (AC Cabling)	DISCOM	N/A
3.8	Cable Tray/ Conduits with supporting structures	EPC Contractor	Conduits have been considered for DC/AC cable Routing
3.9	HT Panel	N/A	Evacuation considered at LT Panel of same building @415V
3.10	Step-Up Transf. & Accessories	N/A	Evacuation considered at LT Panel of same building @415V
3.11	Module Cleaning System	Consumer	In Consumer Scope
3.12	Hand Rail	Consumer	Handrail/Parapet Walls on RCC Roofs in Customer Scope.
3.13	Staircase/Monkey Ladder	Consumer	Site Access (Staircase) in Customer Scope
3.14	PV-DG Controller	Consumer	Not Considered in any form ie. RPR/ Fuel Saver PLC Based PVDG Controller, etc.
3.6	Civil Works (if required)	EPC Contractor	Pedestals, cable trenching (if needed).
4	Grid Connection & Net Metering		
4.1	Liaisoning with DISCOM for Grid Approval	EPC Contractor (mostly)	Consumer may assist in document signatures.
4.2	Application for Net Metering	EPC Contractor (with Consumer)	Consumer's documents like PAN, Aadhaar needed.
4.3	Procurement of Bi-directional meter, Modem And Meter Box	Consumer (With EPC Contractor)	Only Applicable In HT Consumers.
4.4	Installation of Net Meter	DISCOM (coordinated by EPC)	EPC will ensure DISCOM visit and coordination.
4.5	CEIG Approval (if required)	EPC Contractor (with Consumer)	Required for capacity >10kW in Gujarat.
5	Testing & Commissioning		
5.1	System Testing (insulation, polarity, continuity, etc.)	EPC Contractor	Complete testing prior to energization.
5.2	Synchronization with Grid	EPC Contractor	In coordination with DISCOM.
5.3	Final Commissioning	EPC Contractor	Post-approval and net meter installation.

19-12-2025

6	Documentation & Handover		
6.1	Submission of Final Drawings & Technical Documents	EPC Contractor	Includes SLDs, datasheets, manuals.
6.2	Warranty Certificates	EPC Contractor	For modules, inverters, BOS items.
6.3	O&M Manual & Training to Consumer Staff	EPC Contractor	Brief on periodic maintenance & troubleshooting.
7	Operation & Maintenance		
7.1	O&M Responsibility (5 year free O&M typically)	EPC Contractor	Optional extension through AMC.
7.2	Performance Monitoring System	EPC Contractor	Remote monitoring (Wi-Fi/GPRS) for real-time data.
8	Commercial Aspects		
8.1	Project Financing	Consumer	Unless provided by EPC under RESCO/lease.
8.2	Insurance of Plant (during & post-installation)	Consumer	in consumer scope
8.3	Payment Terms	Consumer	As per contract milestones.
8.4	Transportation	EPC Contractor	Include in EPC Contractor Scope.
8.5	Payment Terms	Consumer	As per contract milestones.

19-12-2025

Technical Considerations – Hi-Tech Solar Solution

At Hi-Tech Solar Solution, we bring tailored engineering insight and practical foresight into every solar installation. For this proposal, we've crafted the following project assumptions and guidelines to ensure seamless delivery, performance, and compliance.

System Design Overview

- The proposed solar PV system aligned with prevailing state net metering policies. The final rating may be fine-tuned during the detailed design phase. Any change in site conditions or reduction in total capacity (beyond 5%) may result in a project cost revision.
- Power generated will be evacuated at 415V through the LT panel of the same building, ensuring localized integration and minimal loss.
- Module tilts are assumed at 10°, or as per the natural slope of the mounting surface, optimizing seasonal sun tracking.

Installation & Materials Approach

- All components will adhere to Hi-Tech Solar Solution's approved brand list. However, in rare cases of non-availability, equivalent alternatives of matching quality may be considered, subject to mutual agreement.
- The installation area must remain completely shadow-free throughout the day. Customers are requested to ensure any nearby obstructions—such as trees or structures—are cleared before execution and remain so during the lifespan of the project.
- No interference (like chemical discharge, obstruction of light, or overheating of the site) should occur that could hinder solar performance. The system relies on consistent, unshaded solar exposure to meet expected generation benchmarks.

Infrastructure & Site Readiness

- Hi-Tech Solar Solution will supply appropriate switchgear and protection devices; however, the customer is expected to provide feeder panels or enclosures required to house these elements at their LT side.
- Any alteration in technical specifications or layout requested after the bid phase (or during site assessment) will be evaluated for commercial impact and may affect the total cost.
- The design includes AC cabling up to the inverter ACDB. Cable lengths beyond BOQ meters (from ACDB to LT panel) will incur additional charges based on the extra meterage.
- For efficient execution, the customer must ensure clear and safe access to the installation location. This includes providing ladders, scaffoldings, and any required paths for movement of materials and personnel.

Execution Terms

- This is a turnkey project. All unused or surplus materials post-commissioning shall be returned to Hi-Tech Solar Solution.
- Regulatory approvals like CEIG and Net Metering (in accordance with the state's current regulations) fall within our scope. If additional permissions are needed, they'll be handled based on agreed terms.
- While Hi-Tech Solar solution will pursue approvals diligently, we are not responsible for delays caused by government bodies or utilities. Any such delays do not constitute grounds for penalties or payment withholding.
- The customer is expected to support the approval process by providing required documents—such as existing CEIG-approved drawings and utility NOCs.
- Any statutory fees, hardware upgrades, or extra charges mandated by DISCOM or authorities will be borne by the customer.

19-12-2025

Commissioning & Performance Definitions

- Commissioning refers to the date the system begins delivering power at the defined delivery point.
- In some cases, where mechanical installation is completed but final commissioning is delayed due to customer-side infrastructure, it will be considered as “Deemed Commissioning.”
- The Delivery Point for energy transfer is defined as the ACDB of the solar plant, which is connected to the customer’s LT electrical panel.

What’s Not Included

- Permanent rooftop access (e.g., lifts, fixed ladders, etc.)
- Operation & Maintenance (O&M) services
- Network devices or IT infrastructure
- Free provision of electricity or water during installation
- Water supply at 6-bar pressure for module cleaning on rooftops
- Spare panels or enclosures at the LT side for power evacuation
- Assurance of rooftop strength—customer must verify that:
 - GI sheets support 20–25 kg/m²
 - RCC slabs support 60–65 kg/m²



19-12-2025

Solar RoofTop System Pricing

Sr No	Item Name	Quantity	Unit	Price / Unit	Amount
1	Solar Power Generating System	31.27	KW	₹ 29,000.00	₹ 9,06,830
2	GST (6%)				₹ 54,410
Solar System & installation cost					₹ 9,61,240

Payment Stages

Payment Stages	Milestone	Percentage of System installation Cost	Remarks	Amount
Stage 1: Booking Amount	At the time of order confirmation.	10%	Ensures order confirmation and documentation.	₹ 96,124
Stage 2: Approval Process	After GEDA registration and feasibility approval.	30%	Do not Covers registration and initial processing fees.	₹ 2,88,372
Stage 3: Installation	After delivery of materials and start of installation work.	30%	For procurement of materials and labor costs.	₹ 2,88,372
Stage 4: Testing & Inspection	After successful installation and CEIG inspection approval.	20%	Covers inspection, testing, and net metering processes.	₹ 1,92,248
Stage 5: Project Handover	On successful commissioning and handover of the solar plant	10%	Final settlement after completion of the project.	₹ 96,124
Total				₹ 9,61,240
GEDA Registration Charges				₹ 15,340
Solar Net Metering Fees (Approx Calculation)				₹ 62,032
Generation Meter, Modem,CT & Meter Box Charges (Approx Calculation)				₹ -
Grand Total				₹ 10,38,612

Banking Detail

Required Documents

Bank Name: AU SMALL FINANCE BANK
 A/C Name: Hi-Tech Solar Solution
 A/C Number: 1107865152531445
 A/C Type: CURRENT ACCOUNT
 IFSC Code: AUBL0002158
 Branch: DAHOD

- 1) Latest Electricity Bill
- 2) Ownership proof
- 3) Aadhar & Pan Card of Authorised Person
- 4) Pan Card & Cancelled Cheque of firm
- 5) Passport size photo of Authorised Person
- 6) GST Certificate
- 7) Undertaking on 300Rs stamp Paper
- 8) Authorisation letter

19-12-2025

System generation & Revenue Details


Solar Roof Top Size: 31.27 Kw

Generation / Day : 156.35Unit

Yearly Saving : 419219Rupees

1st Year Generation : 52403Kwh

25 Year Saving : 10480475Rupees

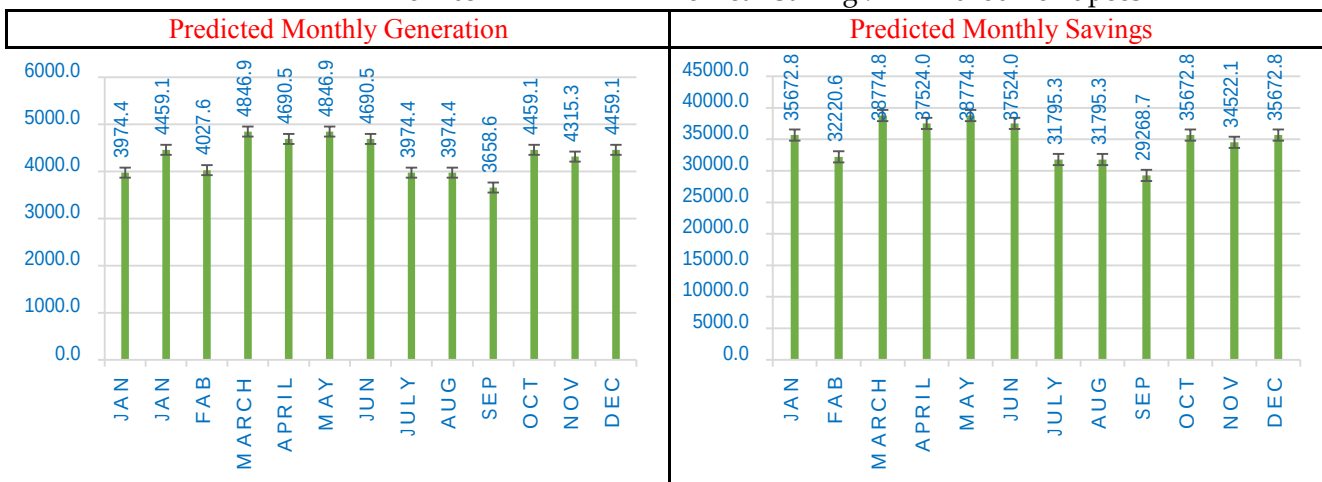

Note

Predicted Generation is Indicative only. It may vary depending upon weather condition & Module Condition.
Savings Calculated @ INR 8/Unit

Solar Plant Installation : Procedure & Time frame

Steps	Procedure	Description	Time Period (Approx)
Step-1	GEDA Registration	Start Registration process By Collecting Required Documents	1-2 working Days
Step-2	Document Verification	Verification of uploaded documents after registration	4-5 Working days
Step-3	Feasibility Approval	DISCOM will Give Feasibility Approval & issue Estimate of solar Meter after Document verification	10- 15 Working days
Step-4	IFP Drawing Approval <u>Applicable for above 10kw</u>	In this step HTSS will make an Electrical drawing and upload on IFP Portal For further installation process.	15 - 20 Working days
Step-5	Execution Work	After Getting all Approvals we will start plant execution work	15 - 20 Working days
Step-6	CEIG Inspection Approval <u>Applicable for above 10kw</u>	After Completing the Installation Process We will Apply for CEIG Inspection,CEIG inspector will physically come on site and verify all the parameters.	15 - 20 Working days
Step-7	Net Metering Process	Once we get CEIG Approval, we will prepare a file for net metering process and submit it to DISCOM for meter installation process	30 - 45 Working days
Step-8	Commissioning & Testing	After Installation and CEIG approval Testing procedure will be done by HTSS	1-2 working Days
Step-9	Completion of project	After testing, HTSS will handover the plant to the client	1-2 working Days

Note

The procedure and timeframe mentioned above are approximate and may vary depending on various factors such as weather conditions, document processing delays, payments delay and approvals from concerned authorities. These timelines are provided as a general guideline and are not fixed.

19-12-2025

Solar Plant ROI Calculator (Input Parameters)

Parameter	Unit	Value	Notes
Project Capacity	kw	31.27	Size of plant
Installation Cost	₹	₹ 9,61,239.80	Total EPC cost
Average Daily Generation	Kwh/Kwp/day	4	Based on site data
Average Yearly Shutdown	Days	30	Plant Maintenance, Grid Side Maintenance, or any Emergency Shutdowns
Electricity Tariff (Year 1)	₹/Kwh	₹ 8.00	Current grid rate
Tariff Escalation	%	3	Expected yearly increase
Annual Power Degradation (After 1st Year)	%	2	Module efficiency drop (As per Modul Data Sheet)
Annual Power Degradation (From 3rd Year to 30 Years)	%	0.5	Module efficiency drop (As per Modul Data Sheet)
O&M Cost (Year 1)	₹	₹ 9,612.40	Maintenance cost
O&M Cost Escalation	%	3	Inflation in O&M
Project Life	Years	30	Standard for solar



19-12-2025

ROI Calculation Table


Year	Generation (kWh)	Tariff (₹/kWh)	Annual Revenue (₹)	O&M Cost (₹)	Net Savings (₹)	Cumulative Savings (₹)	Payback Status
1	41902	₹ 8.00	₹ 3,35,214.40	₹ 9,612.40	₹ 3,25,602.00	₹ 3,25,602	no
2	41064	₹ 8.24	₹ 3,38,365.42	₹ 9,900.77	₹ 3,28,464.65	₹ 6,54,067	no
3	40858	₹ 8.49	₹ 3,46,773.80	₹ 10,197.79	₹ 3,36,576.00	₹ 9,90,643	yes
4	40654	₹ 8.74	₹ 3,55,391.12	₹ 10,503.73	₹ 3,44,887.40	₹ 13,35,530	yes
5	40451	₹ 9.00	₹ 3,64,222.59	₹ 10,818.84	₹ 3,53,403.76	₹ 16,88,934	yes
6	40249	₹ 9.27	₹ 3,73,273.53	₹ 11,143.40	₹ 3,62,130.12	₹ 20,51,064	yes
7	40047	₹ 9.55	₹ 3,82,549.37	₹ 11,477.71	₹ 3,71,071.67	₹ 24,22,136	yes
8	39847	₹ 9.84	₹ 3,92,055.72	₹ 11,822.04	₹ 3,80,233.69	₹ 28,02,369	yes
9	39648	₹ 10.13	₹ 4,01,798.31	₹ 12,176.70	₹ 3,89,621.61	₹ 31,91,991	yes
10	39450	₹ 10.44	₹ 4,11,783.00	₹ 12,542.00	₹ 3,99,241.00	₹ 35,91,232	yes
11	39252	₹ 10.75	₹ 4,22,015.80	₹ 12,918.26	₹ 4,09,097.55	₹ 40,00,329	yes
12	39056	₹ 11.07	₹ 4,32,502.90	₹ 13,305.81	₹ 4,19,197.09	₹ 44,19,527	yes
13	38861	₹ 11.41	₹ 4,43,250.59	₹ 13,704.98	₹ 4,29,545.61	₹ 48,49,072	yes
14	38667	₹ 11.75	₹ 4,54,265.37	₹ 14,116.13	₹ 4,40,149.24	₹ 52,89,221	yes
15	38473	₹ 12.10	₹ 4,65,553.87	₹ 14,539.61	₹ 4,51,014.25	₹ 57,40,236	yes
16	38281	₹ 12.46	₹ 4,77,122.88	₹ 14,975.80	₹ 4,62,147.08	₹ 62,02,383	yes
17	38089	₹ 12.84	₹ 4,88,979.38	₹ 15,425.08	₹ 4,73,554.31	₹ 66,75,937	yes
18	37899	₹ 13.22	₹ 5,01,130.52	₹ 15,887.83	₹ 4,85,242.69	₹ 71,61,180	yes
19	37710	₹ 13.62	₹ 5,13,583.61	₹ 16,364.46	₹ 4,97,219.15	₹ 76,58,399	yes
20	37521	₹ 14.03	₹ 5,26,346.17	₹ 16,855.40	₹ 5,09,490.77	₹ 81,67,890	yes
21	37333	₹ 14.45	₹ 5,39,425.87	₹ 17,361.06	₹ 5,22,064.81	₹ 86,89,954	yes
22	37147	₹ 14.88	₹ 5,52,830.60	₹ 17,881.89	₹ 5,34,948.71	₹ 92,24,903	yes
23	36961	₹ 15.33	₹ 5,66,568.44	₹ 18,418.35	₹ 5,48,150.09	₹ 97,73,053	yes
24	36776	₹ 15.79	₹ 5,80,647.67	₹ 18,970.90	₹ 5,61,676.77	#####	yes
25	36592	₹ 16.26	₹ 5,95,076.76	₹ 19,540.03	₹ 5,75,536.74	#####	yes




19-12-2025

26	36409	₹ 16.75	₹ 6,09,864.42	₹ 20,126.23	₹ 5,89,738.19	#####	yes
27	36227	₹ 17.25	₹ 6,25,019.55	₹ 20,730.01	₹ 6,04,289.54	#####	yes
28	36046	₹ 17.77	₹ 6,40,551.29	₹ 21,351.91	₹ 6,19,199.37	#####	yes
29	35866	₹ 18.30	₹ 6,56,468.99	₹ 21,992.47	₹ 6,34,476.52	#####	yes
30	35687	₹ 18.85	₹ 6,72,782.24	₹ 22,652.25	₹ 6,50,130.00	#####	yes

Graphical Representation Of Yearly Generation V/S Tariff

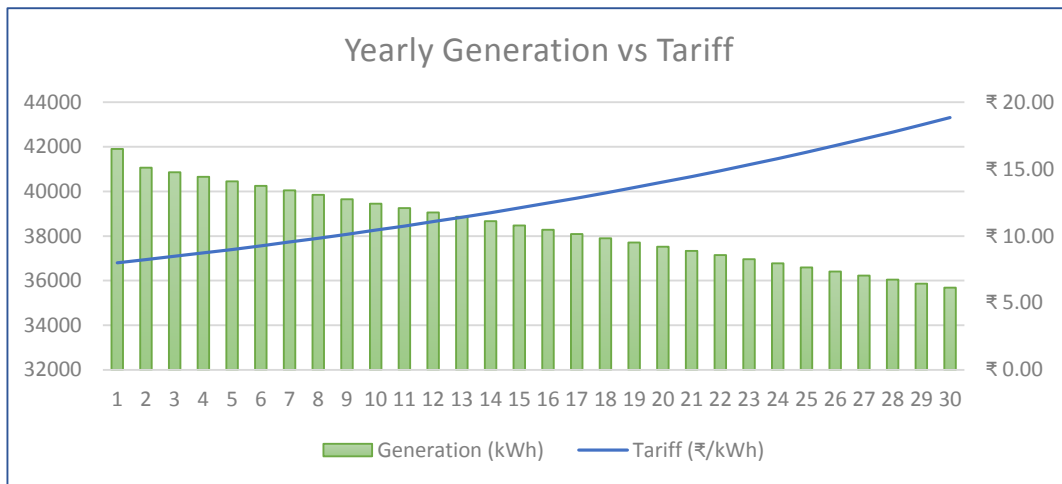

Graphical Representation of Annual V/S Cumulative Savings

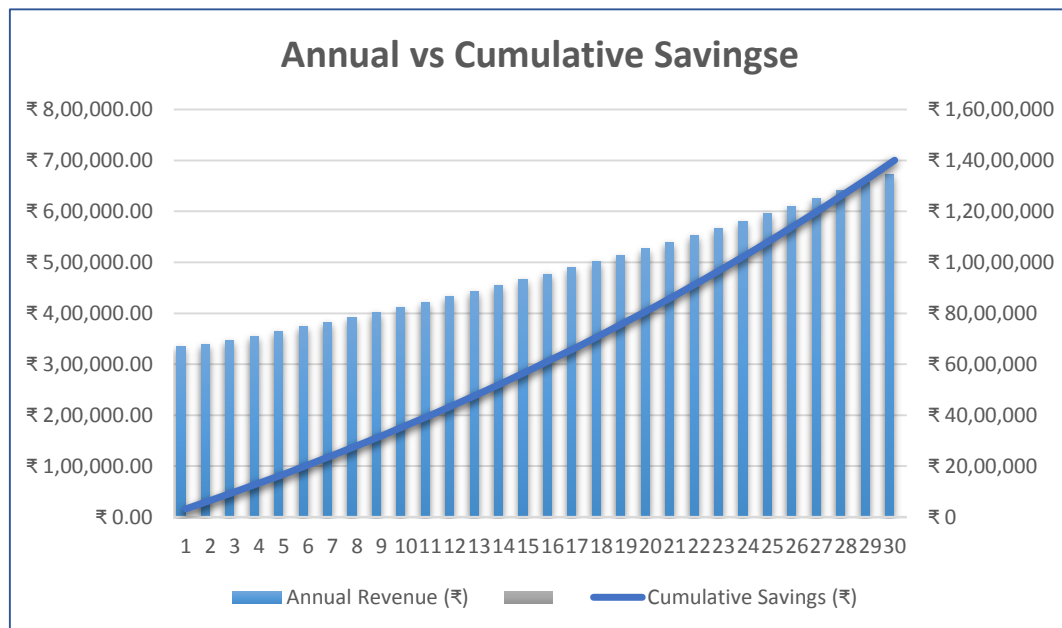

19-12-2025

TERMS AND CONDITIONS

1	<u>Quotation Validity:</u> The quotation provided is valid for a period of 15 days from the date of issuance. Prices are subject to change after this period.
2	<u>Warranty:</u> Hi-Tech Solar Solution warrants the installation workmanship for a period of 5 Years from the date of commissioning. Solar panels, Inverter, MCB, Fuse & cartridges and other equipment are subject to manufacturer warranties, details of which will be provided upon installation.
3	<u>Maintenance and Service:</u> Hi-Tech Solar Solution offers optional maintenance and service plans beyond the warranty period. Details of these plans can be provided upon request.
4	<u>Site Access:</u> The client shall provide unimpeded access to the installation site during agreed-upon times for the duration of the project.
5	<u>Permits and Approvals:</u> It is the responsibility of the client to obtain any necessary permits, approvals, or licenses required for the installation of the solar plant.
7	<u>Interruption in Work:</u> The Customer must not interrupt the works, and/or shall abstain from any act or omission of which it can reasonably be expected that it may delay the works or make the works more difficult and or expensive for HTSS. Customer shall not unreasonably delay any Engineering approvals which will delay the project and make reasonable efforts that all Engineering approvals shall be provided within 7 days of submission of drawings.
7	<u>Liability:</u> Hi-Tech Solar Solution shall not be liable for any damages or losses resulting from acts of nature, accidents, or misuse of the solar plant after installation.
8	<u>Changes and Modifications:</u> Any changes or modifications to the project scope must be agreed upon in writing by both parties and may result in adjustments to the project timeline and cost.
9	<u>Cable length:</u> Described cable length in BOQ is included in standard plant rate. length more than from described BOQ will be charged extra as per Actual.
10	Plant capacity may vary due to Solar Panel Size Availability. Final billing amount vary accordingly.
11	We will repair or, if found necessary replace a defective component of solar system for failure due to manufacturing defects & The repaired/replaced part or Solar system does not carry a new warranty
12	<u>Exclusions:</u> The warranty does not cover damage caused by acts of nature, accidents, misuse, or unauthorized modifications to the solar plant. Damage resulting from improper installation, maintenance, or servicing by parties other than Hi-Tech Solar Solution is not covered under this warranty.
13	<u>Inclusion of Excluded Items:</u> Any additional items due to change in scope or due to change in building or initial layout shall be charged extra and will be to customer's account.

19-12-2025

14	<u>Security and Safety:</u> On delivery of supplies to Customer's site in good condition, Customer shall be responsible for safety & security of the materials till handing over of the same to HTSS designated personnel for installation. Customer shall resolve the disturbances at its premises and neighbouring areas which will impact the project progress at its own risk & cost and for smooth execution of the project by HTSS. In such case, Customer shall provide safety & security for the HTSS designated personnel working at site. Any delay in execution or damage of materials due to any disturbances at site shall be attributable to and compensated by Customer.
15	<u>Force Majeure Clause:</u> Force Majeure refers to any event or circumstance, whether existing or arising in the future, that lies beyond the reasonable control of HTSS . Such events may include, but are not limited to, natural calamities like storms, earthquakes, floods, fires, or explosions; health-related crises such as epidemics or quarantines; labor disturbances including strikes, riots, lockouts; as well as war, terrorism, embargoes, civil or military interference, or government actions and regulations enacted in a sovereign capacity. All such instances shall collectively be deemed "Force Majeure." If a Force Majeure event prevents HTSS from fulfilling its obligations under this Proposal, the company shall not be delay responsible for such non-performance, provided the event is directly responsible for the delay or failure. However, this does not absolve the Customer of its obligation to fulfill all payment-related commitments. In the event of a suspension due to Force Majeure, HTSS shall be entitled to recover the following costs: 1) Payments for all work completed up to the date of suspension. 2) Expenses related to materials already delivered to the Customer or those for which HTSS remains liable. 3) Other reasonable costs incurred in anticipation of project completion, including any unamortized material expenses. 4) Charges associated with the demobilization of workforce and equipment. 5) Any additional costs incurred due to the suspension of third-party supplier contracts.
16	<u>Termination by Customer for Contractor Default:</u> The Customer reserves the right to terminate the Contract immediately under the following conditions, by providing written notice to the Contractor stating the reasons for termination: Grounds for Termination: Abandonment or Repudiation: The Contractor has abandoned or repudiated the Contract. Insolvency or Bankruptcy: The Contractor: Becomes bankrupt or insolvent Has a receiving order issued against it Compounds with its creditors In the case of a corporation, a resolution is passed or a court order is made for its winding up

19-12-2025

	Entitlements Upon Termination: In the event of such termination: The Contractor shall be entitled to receive payment for: The portion of the Contract Price attributable to the Facilities completed up to the termination date The value of unused or partially used Plant and Equipment present on-site Reasonable costs incurred in protecting the Facilities and restoring the Site to a clean and safe condition Deductions: Any amount owed by the Contractor to the Employer that accrued before the termination date will be deducted from the total amount payable to the Contractor.
17	<u>Termination by Contractor Due to Customer Default:</u> The Contractor may terminate the Contract immediately by providing a written notice of termination along with the reasons for such termination, under the following circumstances: Grounds for Termination Non-Payment or Invoice Disapproval The Customer fails to pay any due amount under the Contract within the specified period. The Customer fails to approve an invoice. Customer Insolvency or Bankruptcy The Customer becomes bankrupt or insolvent. A receiving order is issued against the Customer. The Customer compounds with its creditors. If the Customer is a corporation, a resolution is passed or an order is made for its winding up. Failure to Support Contractor Obligations The Contractor is unable to fulfill its obligations due to reasons attributable to the Customer, including but not limited to: Failure to provide possession of or access to the Site or other necessary areas. Failure to obtain any required government permits. Failure to issue dispatch clearance within the specified time.
18	<u>Contractor's Entitlement Upon Termination:</u> If termination occurs due to the above reasons, the Customer is liable to compensate the Contractor for all related losses and damages, including but not limited to: Contract Price Payment for the portion of the Facilities already executed as of the termination date. Demobilization Costs Expenses for demobilization of equipment and Contractor personnel. Subcontractor Settlements Any payable amounts or cancellation charges to Subcontractors due to subcontract termination. Site Management Costs Costs incurred to protect the Facilities and leave the Site in a clean and safe condition.

	Third-Party Commitments Expenses arising from obligations and claims the Contractor has undertaken in good faith with third parties related to the Contract.
19	Upon verification of a valid warranty claim, Hi-Tech Solar Solution will repair or replace the defective components within a reasonable time frame. If repair or replacement is not feasible, Hi-Tech Solar Solution reserves the right to provide an alternative solution

 HI - TECH SOLAR SOLUTION	RAJ NONWOVEN ENTERPRISE
--	---------------------------------------